



Cobra/Prima Fuse TIMED SAFETY FUSE




Petro-Explo, Inc.

Construction specifications

Fuse Weight:	4.6 grams Black Powder / meter
Burn Rate:	135 s/m +/- 10%
Shell OD:	5.4 mm
Tensile Strength:	28 kg minimum
Spark Gap:	51 mm minimum
Outer Jacket Material:	Plastic
Fuse Color:	Orange
Water Resistance:	1 ATM / 1 hour

Shipping Information

Quantity per box:	1,000 meters / case (4 x 250 m rolls)
Proper Shipping Name:	"Fuse, safety, 1.4S, UN0105, PGII"
Hazard Class:	1.4S, EX - 1983110105
Dimensions:	390 x 350 x 355 mm
Net Weight:	20.78kg
Gross Weight:	21.76 kg
Net Explosive Content:	4.7 kg / case

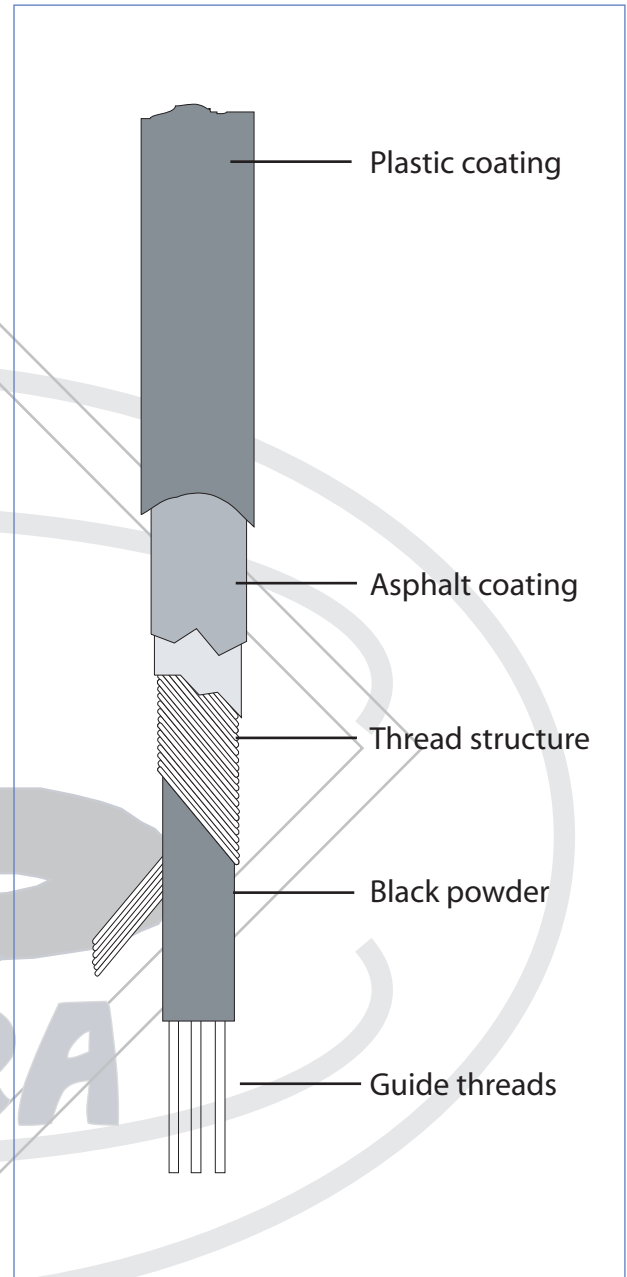

STORAGE

Cobra/Prima Fuse® must be stored in a dry, ventilated magazine and away from explosives and flammable products, according to applicable legislation.

When kept in its original package and properly stored, the shelf life is five (5) years.

Petro-Explo, Inc.

7650 U.S. Hwy. 287, #100, Arlington, Texas 76001
Phone: 817-478-8888 800-588-8282 Fax: 817-478-8891
email: info@petroexplo.com