


Petro Explo

Initiating Explosive Systems

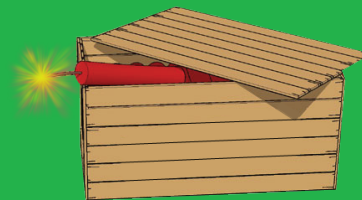

Cobra Fuse Assembly No Connector

Detonator Specifications:

Total Detonator Charge: 800 mg
Powder Train: 4.7 g/m
Burn Rate: 141-148 s/m
Tensile Strength: 28 kg minimum
Water Resistance: 1 ATM/ 1 hour
Static Shunt: Iron Staple for protection against static
Jacket Material: Plastic
Color: Orange / Aluminum Shell
Fuse Lengths: 1 meter, 2 meters, 4 meters

Shipping Information:

Proper Shipping Name: "UN0361, Detonators,
Non-Electric, 1.4B

Part Number: Cobra Fuse Assembly
EX Number: 2005040496
Packaging: 1M & 2M - 54 units per case
4M - 45 units per case

Net Weight	Gross Weight	Net Explosive Content
1M - 1.3 kg	2.34 kg	297 g per case
2M - 2.38 kg	3.44 kg	551 g per case
4M - 4.23 kg	5.25 kg	882 g per case

Warnings & Recommendations:

This product is not authorized to be used in avalanche control applications, except by certified blasters or by qualified avalanche control blasters as defined by the NSSA that are state or federal state licensed, and/or that are required to follow NSSA guidelines and procedures in the use of explosives in avalanche control. In applications other than avalanche control, it is required that they user must be a certified blaster. When using safety fuse assemblies to initiate other detonators or explosive charges, it is recommended to double prime. Also, in case of misfire it is recommended a waiting period of 60 minutes before the blaster or any other personal returns to the blasting area.

