


Petro Explo

Initiating Explosive Systems

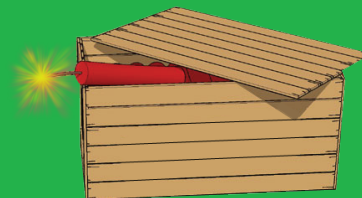

Cobra Fuse Assembly With Connector


Detonator Specifications:

Total Detonator Charge: 800 mg
 Powder Train: 4.7 g/m
 Burn Rate: 141-148 s/m
 Tensile Strength: 28 kg minimum
 Water Resistance: 1 ATM/ 1 hour
 Static Shunt: Iron Staple for protection against static
 Jacket Material: Plastic
 Color: Orange / Aluminum Shell
 Fuse Lengths: 1 meter, 2 meters,
 3 meters, 4 meters

Shipping Information:

Proper Shipping Name: "UN0361, Detonators,
 Non-Electric, 1.4B
 Part Number: Cobra Fuse Assembly
 EX Number: 2005040494
 Packaging: 1M & 2M - 54 units per case
 3M & 4M - 45 units per case

Net Weight	Gross Weight	Net Explosive Content
1M - 1.5 kg	2.5 kg	318.6 g per case
2M - 2.6 kg	3.6 kg	572.4 g per case
3M - 3.3 kg	4.3 kg	688.5 g per case
4M - 4.4 kg	5.4 kg	900 g per case

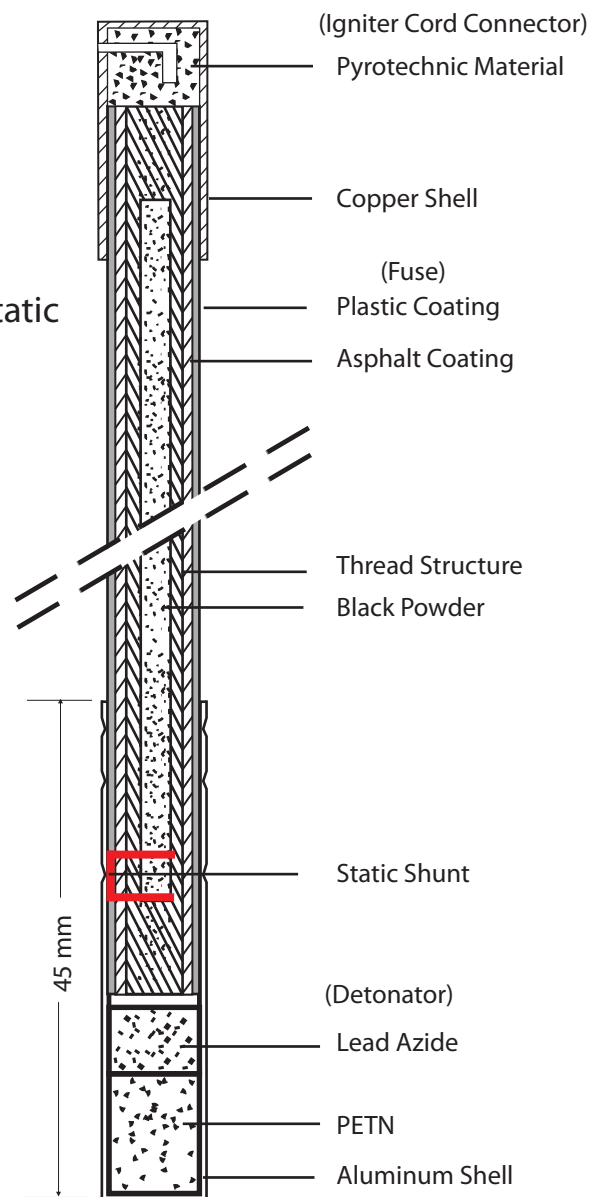

Warnings & Recommendations:

This product is not authorized to be used in avalanch control applications, except by certified blasters or by qualified avalanch control blasters as defined by the NSSA that are state or federal state licensed, and/or that are required to follow NSSA guidelines and procedures in the use of explosives in avalanch control. In applications other than avalanch control, it is required that they user must be a certified blaster. When using safety fuse assemblies to initiate other detonators or explosive charges, it is recommended to double prime. Also, in case of misfire it is recommended a waiting period of 60 minutes before the blaster or any other personal returns to the blasting area.